INDEPENDENT

BATTERY CERTIFICATE

AVILOO
BATTERY DIAGNOSTICS

CERTIFICATE NUMBER: 57A99150-7668-4B62-9FC3-F66BDD9D3236

VEHICLE

BRAND: Nissan
MODEL: Ariya - 87 kWh

MILEAGE: 31,365 mi
VIN: JN1DF0BB6RM739042
DATE AND TIME:
10/16/26, 9:17 AM

EXECUTED BY: Reds Auto and Truck

RESULTS

Independent
STATE OF HEALTH (SOH)

98.5 %

ENERGY 86kWh | 87kWh

WLTP RANGE 324mi | 329mi

RATING

BENCHMARKING
How does your vehicle compare to comparable vehicles?

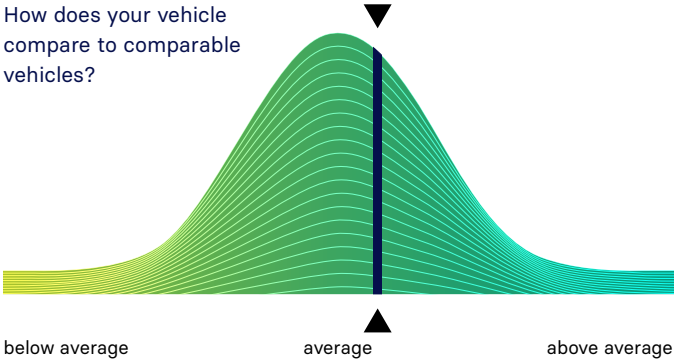

CHECKS

- Battery Management System (BMS) ✓
- Battery Sensor ✓
- Battery Measurements ✓
- Battery Cell Voltages ✓
- Vehicle Communication ✓

SCAN FOR DETAILS

EVALUATION

EXCELLENT HEALTH - NO ABNORMALITIES DETECTED

Based on the detailed battery diagnostics performed with the AVILOO FLASH Test, we hereby certify that the drive battery of this vehicle is in excellent condition.

The drive battery is therefore officially AVILOO Certified.

Dr. Marcus Berger, CEO

THIS BATTERY IS TESTED AND AVILOO CERTIFIED
AVILOO CERTIFIED

EXECUTED BY:

RED'S AUTO AND TRUCK
EST 1974
LONGMONT, CO

ENERGY

	Gross	Net (Nominal)	Usable
Current:	89.6kWh	85.7kWh	82.4kWh
New:	91.0kWh	87.0kWh	83.7kWh

SENSORS

Voltage Sensor	✓
Current Sensor	✓
Temperature Sensors	✓
Cell Voltage Sensors	✓

RANGE

	WLTP	Typical
Current:	306-324mi	233mi
New:	311-329mi	237mi

BMS

	Value	Status
BMS State of Charge (SoC)*:	92%	
SoC calculation accuracy:		✓
BMS State of Health (SoH)*:	100%	
SoH calculation accuracy:		✓

EXECUTION PROTOCOL

AVILOO Box connected.	09:17:41
FLASH Test started.	✓
Vehicle detected.	✓
Data acquisition started.	✓
Data acquisition completed.	✓
Data analysis started.	✓
Data analysis completed.	✓

MEASUREMENTS

	Min	Max	Delta	Status
Battery Temperature	46.4F	48.2F	1.8F	✓
Cell Voltage	4.092V	4.100V	7mV	✓
Pack Voltage	393.1V			
Average Current	-1.0A			

CELL VOLTAGES DIAGRAM

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
1 - 20	4.092	4.094	4.095	4.095	4.094	4.095	4.094	4.095	4.095	4.095	4.095	4.095	4.095	4.095	4.095	4.095	4.095	4.097	4.097	4.097
21 - 40	4.095	4.095	4.095	4.095	4.095	4.095	4.095	4.095	4.098	4.100	4.098	4.100	4.098	4.100	4.098	4.098	4.098	4.098	4.100	4.100
41 - 60	4.098	4.100	4.098	4.100	4.100	4.097	4.100	4.097	4.095	4.100	4.098	4.098	4.098	4.100	4.100	4.098	4.095	4.098	4.098	4.097
61 - 80	4.095	4.097	4.097	4.098	4.098	4.095	4.097	4.095	4.094	4.094	4.094	4.094	4.094	4.095	4.094	4.095	4.095	4.095	4.094	4.095
81 - 96	4.095	4.095	4.095	4.095	4.095	4.095	4.095	4.095	4.095	4.097	4.095	4.095	4.097	4.095	4.095	4.094				

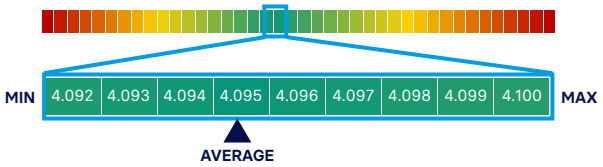

*The values shown here were read directly from the vehicle's battery management system (BMS) and are calculated and provided by the vehicle manufacturer. The State of Health (SoH) displayed corresponds to the value reported by the BMS and is CARA-certified.

DISCLAIMER: The test result includes the currently calculated state of health (SoH) of the drive battery. The determination is based on data provided by the vehicle. These are evaluated by AVILOO's algorithms using statistical and analytical models. Manipulation of the data in the control unit leads to an incorrect result. The indicated SoH has a technically induced fluctuation range (deviation) of no more than 3% in at least 95% of reference measurements. It should be noted that this tolerance applies to the SoH determination at the cell level and not to the SoH of the entire battery. This is because the state of charge of individual cells may vary, which can negatively affect the current SoH of the battery. However, this can be compensated by the Battery Management System (BMS) or during a calibration. The result reflects the condition of the battery at the time of the test. No conclusions can be drawn about the future state of health of the battery from this. Statements about mechanical damage or external influences are not part of this diagnosis.

57A99150-7668-4B62-9FC3-F66BDD9D3236

AVILOO Inc. | 4949 S Syracuse St Ste 550 | 80237 Denver, CO | United States | help.usa@aviloo.com